

# 产品承认书

## SPECIFICATION

客户名称 Customer			
产品型号 Product No.	SP-R13-068-A03.1-M13SY		
客户型号 Customer No.	13串18A分口/1.2.2AWK08001		
版次 Version	V0	页数 Page	5
文件编号 Document No.		送样日期 Sample Date	2018.01.20
编制 PREPARED By	审核 CHECKED By	批准 APPROVED By	品质部 Quality department
龙伟全			

### 客户确认栏 CUSTOMER APPROVED

确认意见 INSPEC.RESULT:

客户签章:

APPROVAL SIGNET:

日期 Date:

深圳市超力源科技有限公司

**SHENZHEN SuperPower Technology CO.,LTD**

地址: 深圳市宝安区沙井镇共和村丽城科技工业园第三期J栋9楼

ADDR: 9/F,J Buliding,Licheng High-tech Park ,Gonghe Village Shajing Town,Shenzhen City

TEL: 86-755-6154 8101

FAX: 86-755-6154 8168

注: 客户收到样品以及规格书后, 请及时回复, 如在 7 天之内无回复, 我司将视客户已承认此规格书中的参数以及送样样机。规格书中的图片为通用机型的图片, 可能与送样样机有一定的差异; 此份规格书超力源保留最终解释权。

Notice: Give us feedback when customers are in receipt of the samples and specification, Once not any reply within seven days, it will be regarded as agreement of the parameters in the specification and samples. SuperPower has the final authority to explain the photographs in the specification which is different from sample machine.

客户承认签名处 Customer Approved:

Characteristics subject to change without notice. 1 of 5

## 一、综述 Outline

本规格书适合于深圳市超力源科技有限公司研制的 13 串锂电动力电池保护板，本产品严格满足 ROHS 规范等。This specification applies to the 13 serial-cells lithium manganese battery protection board manufactured by Shen Zhen SuperPower technology CO.,LTD, which strictly conforms to the ROHS standard.

## 二、应用范围 Application

锂离子、聚合物锂电池等可充电锂电池包。Applies to the rechargeable Lithium battery packs and so on.

## 三、电气参数 Electrical Characteristic (Ta = 25 °C.)

Details 详细项目		Min.	Typ.	Max	Error	Unit
Battery Gas 电池类型		3.7V 锂电池				
Battery Link 电池组组合方式		13S 分口				
Loop capability 回路性能						
Input Charging Voltage 充电电压			54.6		±1%	V
Input Charging Current 充电电流			2	MAX5A		A
Output Discharging Voltage 放电电压			48.1			V
Continuous Output Discharging Current (可持续工作电流)			18	MAX18A		A
Ambient Condition 工作环境	Operating Temperature 工作温度	-20	25	60		°C
	Humidity (No Water-Drop)工作湿度	0%		90%		RH
Storage Condition 存储环境	Temperature 存储温度	-40		85		°C
	Humidity (No Water-Drop)存储湿度	0%		90%		RH
Protection Parameters (for Individual Cell).保护参数 (对于每节电芯)						
Over-Charge Voltage Protection (OVP) 过充保护电压			4.25		±25mV	V
过充延时			1000±300 ms			ms
Over-Charge Voltage Protection Release (OVPR)过充恢复电压			4.19		±50mV	V
Over-Discharge Voltage Protection (UVP)过放保护电压			2.50		±80mV	V
过放延时			96±30ms			ms
Over-Discharge Voltage Protection Release (UVPR)过放恢复电压			2.70		±300mV	V
Over-Current Discharge Protection (OCDP)放电过流保护			80		±10	A
Over-Current Protection Delay Time (OCPDT)过流保护延时			20		±10	mS
Over-Current Discharge Protection Release 放电保护恢复方式		Release load 断开负载				
Short circuit current protection 短路保护		Enable 有短路保护				
Short circuit current protection delay time 短路保护延时			200	600	800	uS
Short circuit protection Release 短路保护恢复方式		Release load 断开负载				
Discharging Temperature 放电保护温度			75	外置	±5	°C
Discharging Temperature Protection Release 放电保护恢复温度			53		±14	°C
charging Temperature 充电保护温度			----			°C
charging Temperature Protection Release 充电保护恢复温度			----			°C
Cell balance 均衡						
Bleed StartPoint 均衡开启电压			----		----	----
Bleed Current 均衡电流			----		----	----
Balance Mode 均衡方式		----				
Idle mode 静态模式			≤60			uA
Main loop electrify resistance 主回路通态电阻 MOS-R <sub>DS</sub>			≤40			mΩ
PCBA Size装配结构尺寸		60 (±0.5) × 32 (±0.5) × <12				mm

备注: Notice::

1、使用过程中请遵循设计参数及使用条件，不得超过本规格书中的值。

Make sure the design parameters and conditions of usage are under the values which are shown in the specification.

2、请客户注意:我司各型号保护板在批量出货过程中，不同批次的订单我司有可能更换不同品牌不同型号的

MOS 管，但是前提是在能满足上述性能指标的情况下而做出的更改。

#### 四、连接方式 Connection To The Board

##### 1、保护板连接示意图 Connection Diagram of P

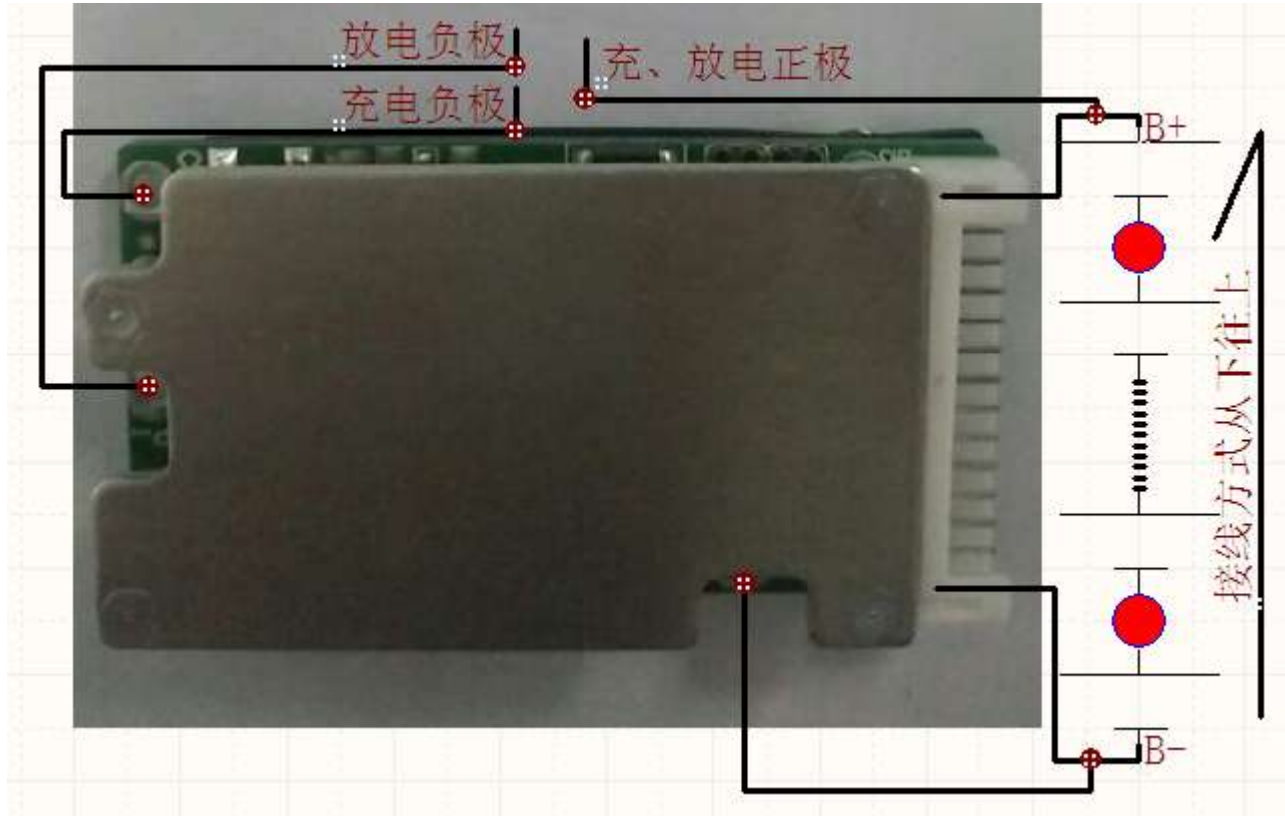


图1. 保护板连接示意图 Figure1 Diagram connection of PCM

排线：散线\_14Pin\_PH2.0\_UL1007\_22AWG左附22AWG黑线\_350mm（连接处打热熔胶）

硅胶线： B-无（总负极线）

P-无（放电负极线）

C-无（充电负极线）

## 五、连接的注意事项 Matters need attention when connecting

**警告：**把保护板连接至电芯，或从电池组拆下保护板时，必须遵守以下连接顺序与规定；如果不按要求的顺序作业，会损坏保护板的元器件，从而导致保护板不能保护电芯，造成严重的后果。

**Warning:** Please remember to keep to the following order and rules when connecting cells to the PCM board and disconnecting them. If not, the PCM board will possibly be damaged, then the PCM board fails to protect battery cell which will cause terrible result.

**准备工作：**按照接线图所示，将J1对应的电压检测排线连接至电池组。请注意插座所标示的引顺序。

**Preparation:** Connect the flat cable, which is use to detect battery voltage, to cells as described in Figure 1 and Figure 2. Please pay attention to the pin order of the plug.

### A. 连接保护板步骤 Connection PCM steps

- 1) 连接电池组的负极B-; **Connect the negative of battery B-.**
- 2) 连接电池组的排线（注意正、负极方向）; **connect the flat cable (Notice: Port polarity) .**
- 3) 连接电池组的正极B+; **connect the positive of battery B+.**
- 4) 连接充电器或者负载; **Connect the charger or load.**

### B. 断开保护板的步骤 Removed PCM steps

- 1) 断开负载或者充电器; **Remove the load or charger.**
- 2) 断开电池组负极的B+连接线; **Remove the B+ wire.**
- 3) 拔下J1插头里的电压检测线; **Remove the flat cable.**
- 4) 断开电池组负极的B-连接线; **Remove the B- wire.**

**特别说明：**在此环节中要注意静电的防护。

**Special Notice:** Pay attention to the protection of static electricity.

## 六、其他说明 The other

- 1、在对装好保护板的电池组进行充放电测试时,请不要使用电池老化柜对电池组各节电池电压进行测量，否则有可能损坏保护板和电池。

During the charging and discharging test on the battery packs assembled with protection board , please don't use battery aging ark to of the battery ark battery voltage measurement, otherwise you might damage and battery protection board.

- 2、本保护板没有0V充电功能，电池一旦出现0V的情况下，电池将严重退化直至损坏，为了不损坏电池，用户在长期（电池组容量大于2AH,储存超过3个月）不使用时请定期充电补充电量，在使用过程中放电保护后，须在12小时内及时充电，防止电池因自耗电而放电至0V.

This protection board doesn't have 0 V charge function. Once the battery shows 0 V phenomenon, the battery will degenerate seriously even be damaged. In order not to do damage to the battery, users should charge power regularly when not using for a long time(the battery capacity is greater than 2 AH and the storage time is more than 3 months). During the process of discharge protection, it should be charged in time within 12 hours, preventing low power consumption and discharging to 0 V.

- 3、本保护板配反充电保护功能，但使用时不可将充电输入反接，否则可能损坏保护板和电池。

This protection board doesn't enjoy the charging protection function in the opposite position. Please don't charge it oppositely, otherwise it may damage the protection board and batteries.

### 七、主要元器件

类型	名称	
保护 IC	IC_SOT-23-6_MM3280J07	
充电 MOS 管	SMD_MOSP 管 TO-263_SKSS055N08_环保	或 RU8590S
放电 MOS 管	SMD_MOSP 管 TO-263_SKSS055N08_环保	或 RU8590S
功率电阻	SMD 电阻_2512_0.007R/2W_F_环保*3	

请客户注意: 我司各型号保护板在批量出货过程中, 不同批次的订单我司有可能更换不同品牌不同型号的 MOS 管, 但是前提是在能满足上述性能指标的情况下而做出的更改。

### 八、产品修订记录表 Product Modified Record List

版本 Revision	变更内容 Modified Content	责任人 Principle	日期 Date	标记 Mark	备注 Note
A	设计 Design	C.Q.W	2018.01.20		